

11MHz, Low Power, Low-Noise, RRIO, CMOS Amplifiers

1 Features

- Wide Bandwidth and High Slew Rate: 11MHz and 11.5V/ μ s
- Fast Settling: 0.26 μ s to 0.1%
- Low Noise: 8nV/ $\sqrt{\text{Hz}}$ at 1kHz
- Low Input Offset Voltage: $\pm 0.5\text{mV}$
- Single 1.8V to 5.5V Supply Voltage Range at 0°C to 70°C
- Rail-to-Rail Input and Output
- Internal RF/EMI Filter
- Low Supply Current: 780 μ A at 5.5V Supply Per Amplifier
- Extended Temperature Range: -40°C to +125°C

2 Applications

- Battery-Powered Instruments:
 - Consumer, Industrial, Medical, Notebooks
- Audio Outputs
- Motor Phase Current Sense
- Photodiode Amplification
- Sensor Signal Conditioning:
 - Sensor Interfaces, Loop-Powered, Active Filters

3 Description

The GD30AP72x family of single-, dual-, and quad- channel operational amplifiers represents a new generation of general-purpose, low-power op-amps. Featuring rail-to-rail input and output (RRIO) swings, low quiescent current (typical 780 μ A) combined with a wide bandwidth (11MHz) and very low noise (8nV/ $\sqrt{\text{Hz}}$ at 1KHz) makes this family very attractive for a variety of battery-

powered applications that require a good balance between cost and performance, such as audio outputs, motor phase current sensing, photodiode amplification, barcode scanners and white goods. The low input bias current supports these amplifiers to be used in applications with mega-ohm source impedances.

The robust design of the GD30AP72x amplifiers provides ease-of-use to the circuit designer: unity-gain stability with capacitive loads of up to 500pF, integrated RF/EMI rejection filter, no phase reversal in overdrive conditions, and high electro-static discharge (ESD) protection (3kV HBM). The GD30AP72x amplifiers are optimized for operation at voltages as low as +1.8V ($\pm 0.9\text{V}$) and up to +5.5V ($\pm 2.75\text{V}$) at the temperature range of 0°C to 70°C, and operation at voltages from +2.0V ($\pm 1.0\text{V}$) to +5.5V ($\pm 2.75\text{V}$) over the extended temperature range of -40°C to +125°C.

The GD30AP721 (single) is available in SOT23-5L, SC70-5L packages. The GD30AP722 (dual) is offered in DFN2x2-8L, SOIC-8L, MSOP-8L and SOT23-8L packages. The quad of GD30AP724 is offered in both SOIC-14L and TSSOP-14L packages.

Device Information¹

PART NUMBER	PACKAGE	BODY SIZE (NOM)
GD30AP721	SOT23-5L	2.92mm x 1.63mm
GD30AP722	DFN2x2-8L	2.00mm x 2.00mm
	SOIC-8L	4.90mm x 3.92mm
	MSOP-8L	3.00mm x 3.00mm
	SOT23-8L	2.90mm x 2.80mm
GD30AP724	SOIC-14L	8.73mm x 3.95mm
	TSSOP-14L	4.96mm x 4.40mm


1. For all available packages, see the [Package Information](#) and [Ordering Information](#) at the end of data sheet.

Table of Contents

1	Features	1
2	Applications	1
3	Description.....	1
	Table of Contents	2
4	Device Overview.....	3
4.1	Pinout and Pin Assignment	3
4.2	Pin Description	3
5	Parameter Information	4
5.1	Absolute Maximum Ratings.....	4
5.2	Recommended Operation Conditions	4
5.3	Electrical Sensitivity	4
5.4	Thermal Characteristics	4
5.5	Electrical Characteristics	5
5.6	Typical Characteristics	7
6	Functional Description	10
6.1	Operating Voltage	10
6.2	Rail-to-Rail Input	10
6.3	Input EMI Filter and Clamp Circuit	10
6.4	Rail-to-Rail Output.....	11
6.5	Capacitive Load and Stability	11
6.6	Overload Recovery	12
6.7	EMI Rejection Ratio	12
6.8	Input-to-Output Coupling	13
6.9	Maximizing Performance Through Proper Layout	13
7	Application Information	15
7.1	Typical Application Circuit	15
8	Package Information	19
8.1	Outline Dimensions	19
8.2	Recommended Land Pattern	33
9	Ordering Information	40
10	Revision History	41

4 Device Overview

4.1 Pinout and Pin Assignment

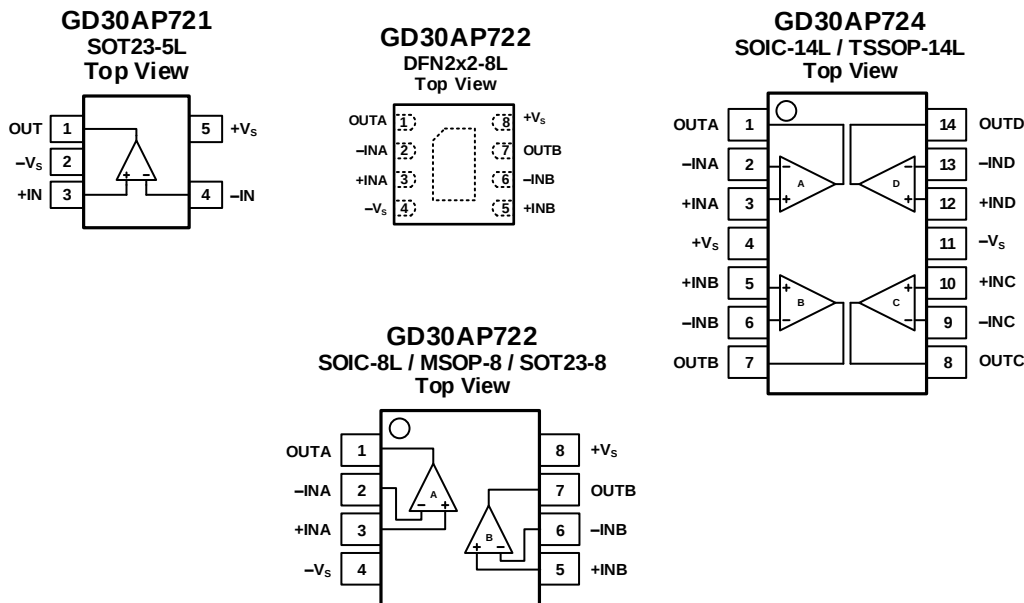

4.2 Pin Description

NAME	PIN TYPE ¹	FUNCTION
-IN	I	Inverting input of the amplifier. The voltage range is from ($V_{S-} - 0.1V$) to ($V_{S+} + 0.1V$).
+IN	I	Non-inverting input of the amplifier. This pin has the same voltage range as -IN.
+Vs	P	Positive power supply. The voltage is from 2.0V to 5.5V. Split supplies are possible as long as the voltage between V_{S+} and V_{S-} is from 2.0V to 5.5V.
-Vs	P	Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between V_{S+} and V_{S-} is from 2.0V to 5.5V.
OUT	O	Amplifier output.

1. I = Input, O = Output, P = Power.

5 Parameter Information

5.1 Absolute Maximum Ratings

Exceeding the operating temperature range (unless otherwise noted)¹

SYMBOL	PARAMETER	MIN	MAX	UNIT
V_{S+} to V_{S-}	Supply Voltage		10.0	V
V_I	Signal Input Voltage	$V_{S-} - 0.5$	$V_{S+} + 0.5$	V
I_I	Signal Input Current	-10	10	mA
	Output Short-Circuit		Continuous	s
T_J	Junction Temperature, T_J		150	°C
T_{stg}	Storage Temperature Range, T_{stg}	-65	+150	°C
	Lead Temperature Range (Soldering 10 sec)		260	°C

1. The maximum ratings are the limits to which the device can be subjected without permanently damaging the device. Note that the device is not guaranteed to operate properly at the maximum ratings. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

5.2 Recommended Operation Conditions

SYMBOL ^{1,2}	PARAMETER	MIN	TYP	MAX	UNIT
V_{S-} to V_{S+}	Input supply voltage range($T_A = 0^{\circ}\text{C}$ to $+70^{\circ}\text{C}$)	1.8		5.5	V
	Input supply voltage range($T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$)	2.0		5.5	V
V_{CM}	Common-mode voltage range	$V_{S-} - 0.1$		$V_{S+} + 0.1$	V
T_A	Operating temperature range	-40		125	°C

1. The device is not guaranteed to function outside of its operating conditions.

5.3 Electrical Sensitivity

SYMBOL	CONDITIONS	VALUE	UNIT
$V_{ESD(HBM)}$	Human-body model (HBM), ANSI/ESDA/JEDEC JS-001-2017 ¹	±3000	V
$V_{ESD(CDM)}$	Charge-device model (CDM), ANSI/ESDA/JEDEC JS-002-2022 ²	±2000	V

1. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
2. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.4 Thermal Characteristics

SYMBOL ¹	CONDITIONS	PACKAGE	VALUE	UNIT
Θ_{JA}	Junction to ambient thermal resistance	SOT23-5L	190	°C/W
		DFN2x2-8L	94	
		MSOP-8L	201	
		SOIC-8L	125	
		TSSOP-14L	112	
		SOIC-14L	115	

1. Thermal characteristics are based on simulation, and meet JEDEC document JESD51-7.

5.5 Electrical Characteristics

$V_S = 5.0\text{ V}$, $V_{CM} = V_S / 2$, $V_O = V_S / 2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$, $T_A = +25^\circ\text{C}$, unless otherwise noted. Boldface limits apply over the specified temperature range, $T_A = -40$ to $+125^\circ\text{C}$.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
OFFSET VOLTAGE						
V _{OS}	Input offset voltage			±0.5	±3	mV
dV _{OS} /d _T	Offset voltage drift ¹	T _A = −40 to +125°C		±1	±3	μV/°C
PSRR	Power supply rejection ratio	V _S = 2.0 to 5.5 V, V _{CM} < V _{S+} − 2V	95	110		dB
		T _A = −40 to +125°C	82			
INPUT BIAS CURRENT						
I _B	Input bias current ¹			1		pA
		T _A = +85°C		150		
		T _A = +125°C		500		
I _{OS}	Input offset current ¹			1		pA
NOISE						
V _n	Input voltage noise	f = 0.1 to 10 Hz		3.7		uV _{P-P}
e _n	Input voltage noise density	f = 1 KHz		8		nV/√Hz
I _n	Input current noise density	f = 1 KHz		5		fA/√Hz
INPUT VOLTAGE						
V _{CM}	Common-mode voltage range		V _S − 0.1		V _S + 0.1	V
CMRR	Common-mode rejection ratio	V _S = 5.5 V, V _{CM} = −0.1 to 5.6 V	68	84		dB
		V _{CM} = 0 to 5.3 V, T _A = −40 to +125°C	65			
		V _S = 2.0 V, V _{CM} = −0.1 to 2.1 V	65	78		
		V _{CM} = 0 to 1.8 V, T _A = −40 to +125°C	62			
INPUT IMPEDANCE						
C _{IN}	Input capacitance	Differential		2.0		pF
		Common mode		3.5		
OPEN-LOOP GAIN						
A _{VOL}	Open-loop voltage gain	R _L = 10 kΩ, V _O = 0.05 to 3.5 V	97	105		dB
		T _A = −40 to +125°C	87			
		R _L = 600Ω, V _O = 0.15 to 3.5 V	85	92		
		T _A = −40 to +125°C	75			
FREQUENCY RESPONSE						
GBW	Gain band width product			11		MHz
SR	Slew rate	G = +1, C _L = 100pF, V _O = 1.5 to 3.5 V		11.5		V/μs
THD+N	Total harmonic distortion + noise	G = +1, f = 1 KHz, V _O = 0.5 V _{RMS}		0.0005		%

Electrical Characteristics

$V_S = 5.0\text{ V}$, $V_{CM} = V_S / 2$, $V_O = V_S / 2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$, $T_A = +25^\circ\text{C}$, unless otherwise noted. Boldface limits apply over the specified temperature range, $T_A = -40$ to $+125^\circ\text{C}$.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
t_s	Settling time	To 0.1%, $G = +1$, 1V step		0.26		μs
		To 0.01%, $G = +1$, 1V step		0.34		
t_{OR}	Overload recovery time	$V_{IN} * \text{Gain} > V_S$		0.3		μs
OUTPUT						
V_{OH}	High output voltage swing	$R_L = 10\text{ k}\Omega$	$V_{S+} - 12$	$V_{S+} - 8$		mV
		$R_L = 600\Omega$	$V_{S+} - 180$	$V_{S+} - 125$		
V_{OL}	Low output voltage swing	$R_L = 10\text{ k}\Omega$		$V_{S-} + 5.5$	$V_{S-} + 8$	mV
		$R_L = 600\Omega$		$V_{S-} + 88$	$V_{S-} + 130$	
I_{SC}	Short-circuit current			+70 / -85		mA
POWER SUPPLY						
V_S	Operating supply voltage	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$	1.8		5.5	V
		$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	2.0		5.5	
I_Q	Quiescent current (per amplifier)	$V_S = 2.0\text{V}$		615	740	μA
		$V_S = 5.5\text{V}$		780	940	

1. Guaranteed by design and engineering sample characterization.

5.6 Typical Characteristics

$V_{CM} = V_S / 2$, and $R_L = 10k\Omega$ connected to $V_S/2$, at $T_A = +25^\circ C$, unless otherwise noted.

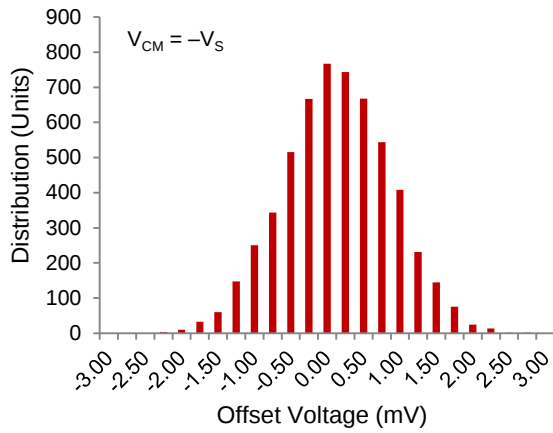


Figure 1. Offset Voltage Production Distribution

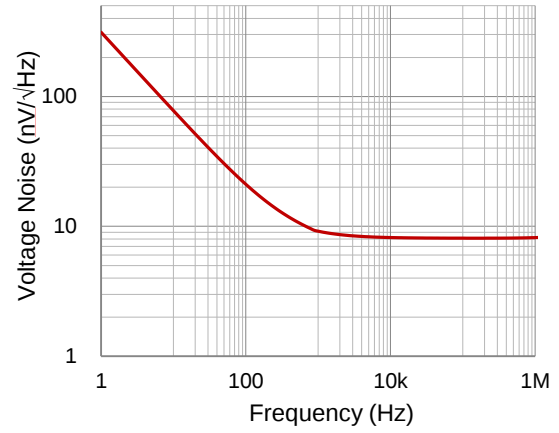


Figure 2. Input Voltage Noise Spectral Density vs. Frequency

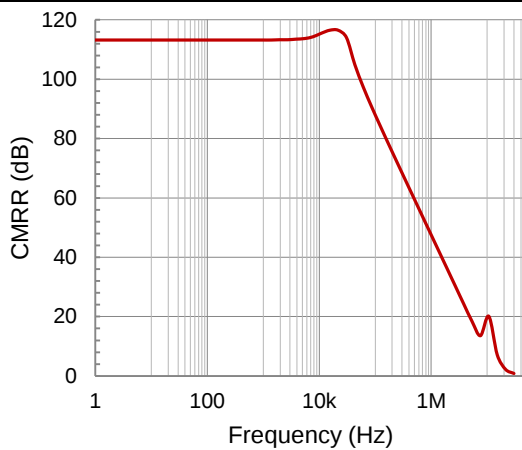


Figure 3. Common Mode Rejection Ratio vs. Frequency

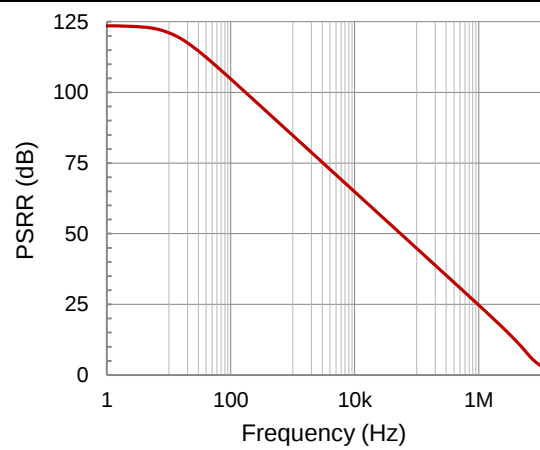


Figure 4. Power Supply Rejection Ratio vs. Frequency

Typical Characteristics (continued)

$V_{CM} = V_S / 2$, and $R_L = 10k\Omega$ connected to $V_S/2$, at $T_A = +25^\circ\text{C}$, unless otherwise noted.

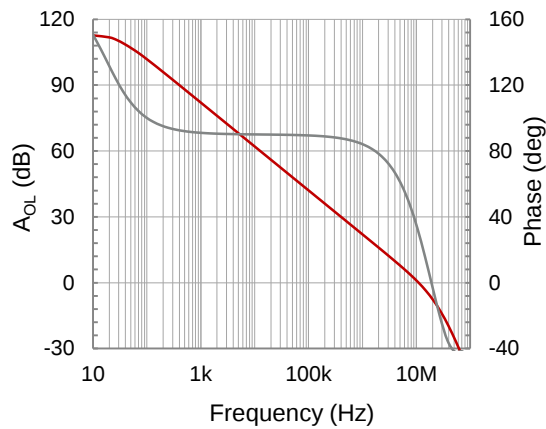


Figure 5. Open Loop Gain and Phase vs. Frequency

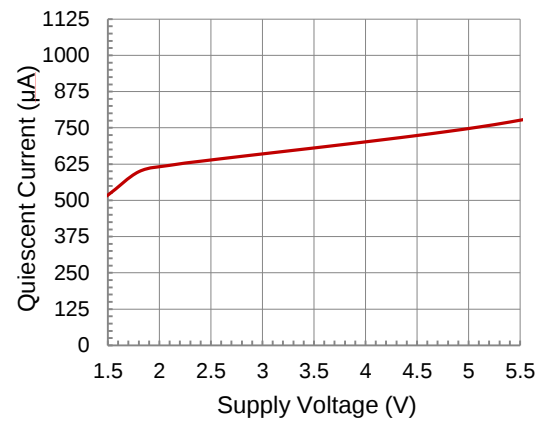


Figure 6. Quiescent Current vs. Supply Voltage

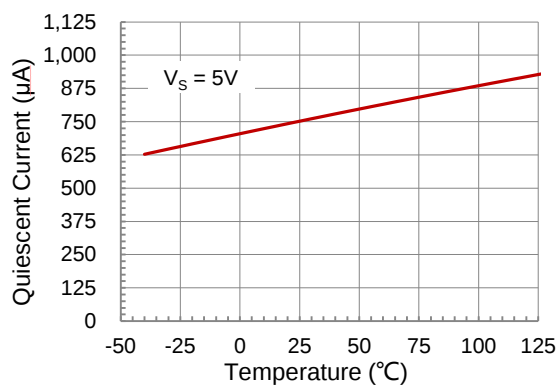


Figure 7. Quiescent Current vs. Temperature

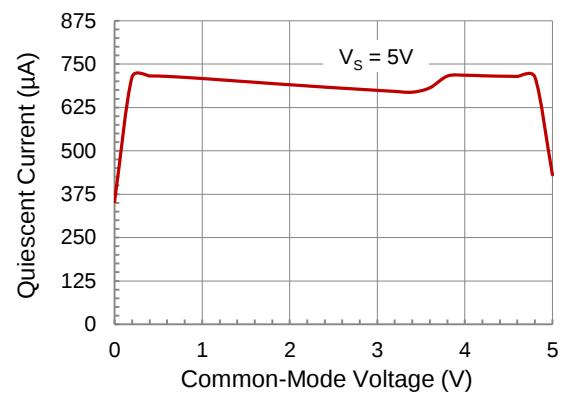


Figure 8. Quiescent Current vs. Input Common-mode Voltage

Typical Characteristics (continued)

$V_{CM} = V_S / 2$, and $R_L = 10k\Omega$ connected to $V_S/2$, at $T_A = +25^\circ\text{C}$, unless otherwise noted.

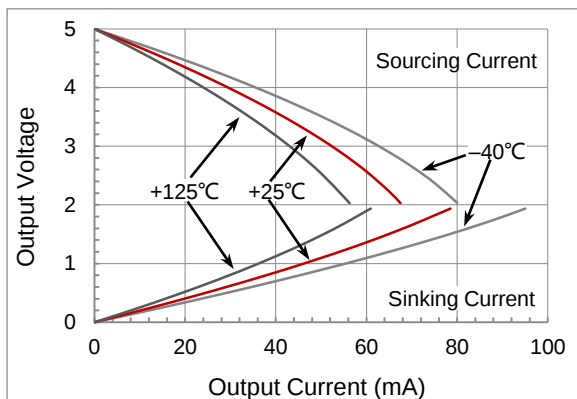


Figure 9. Output Swing vs. Output Current

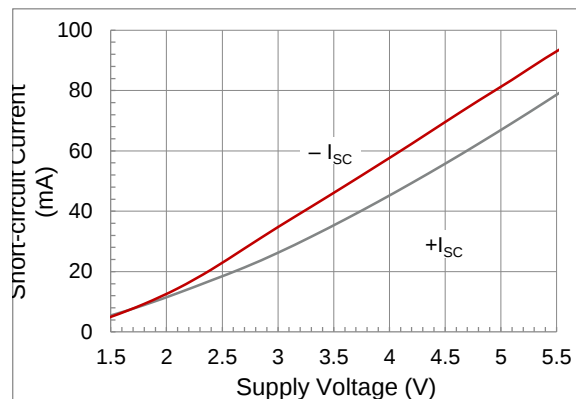


Figure 10. Short Circuit Current vs. Supply Voltage

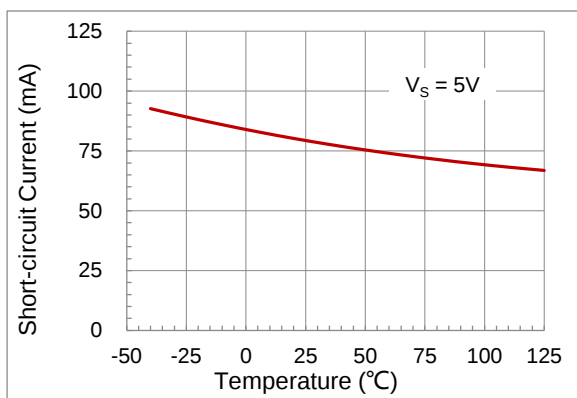


Figure 11. Short Circuit Current vs. Temperature

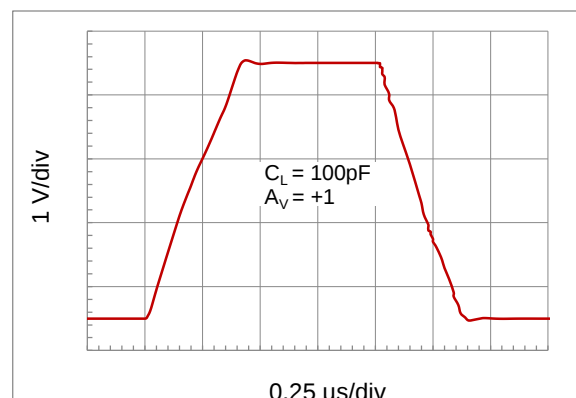


Figure 12. Large Signal Step Response

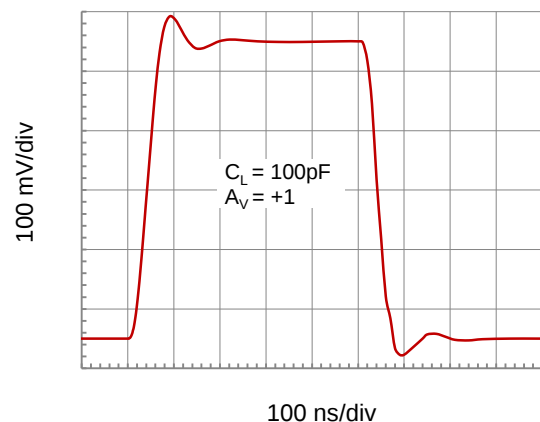


Figure 13. Small Signal Step Response (500 mV)

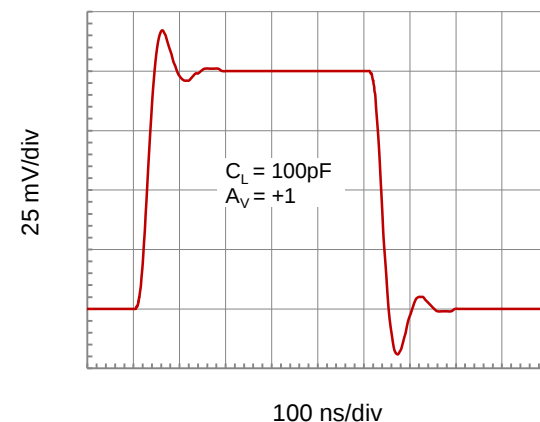


Figure 14. Small Signal Step Response (500 mV)

6 Functional Description

The GD30AP72x is a family of low-power, rail-to-rail input and output operational amplifiers specifically designed for portable applications. These devices operate from 1.8V to 5.5V at the temperature range of 0°C to 70°C, are unity-gain stable, and suitable for a wide range of general-purpose applications. The class AB output stage is capable of driving $\leq 10\text{k}\Omega$ loads connected to any point between V_{S+} and ground. The input common-mode voltage range includes both rails, and allows the GD30AP72x family to be used in virtually any single-supply application. Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications, and makes them ideal for driving sampling analog-to-digital converters (ADCs).

The GD30AP72x features 11MHz bandwidth and 11.5V/ μs slew rate with only 780 μA supply current per amplifier, providing good ac performance at very low power consumption. DC applications are also well served with a low input noise voltage of 8nV/ $\sqrt{\text{Hz}}$ at 1kHz, low input bias current, and an input offset voltage of 0.5mV typically. The typical offset voltage drift is 1 $\mu\text{V}/^\circ\text{C}$, over the full temperature range the input offset voltage changes only 100 μV (0.5mV to 0.6mV).

6.1 Operating Voltage

The GD30AP72x family is optimized for operation at voltages as low as +1.8V ($\pm 0.9\text{V}$) and up to +5.5V ($\pm 2.75\text{V}$) at the temperature range of 0°C to 70°C, and fully specified and ensured for operation from 2.0V to 5.5V ($\pm 1.0\text{V}$ to $\pm 2.75\text{V}$). In addition, many specifications apply from -40°C to $+125^\circ\text{C}$. Parameters that vary significantly with operating voltages or temperature are illustrated in the [Typical Characteristics](#) graphs.

NOTE: Supply voltages (V_{S+} to V_{S-}) higher than +10 V can permanently damage the device.

6.2 Rail-to-Rail Input

The input common-mode voltage range of the GD30AP72x series extends 100mV beyond the negative and positive supply rails. This performance is achieved with a complementary input stage: an N-channel input differential pair in parallel with a P-channel differential pair. The N-channel pair is active for input voltages close to the positive rail, typically $V_{S+}-1.4\text{V}$ to the positive supply, whereas the P-channel pair is active for inputs from 100mV below the negative supply to approximately $V_{S+}-1.4\text{V}$. There is a small transition region, typically $V_{S+}-1.2\text{V}$ to $V_{S+}-1\text{V}$, in which both pairs are on. This 200mV transition region can vary up to 200mV with process variation. Thus, the transition region (both stages on) can range from $V_{S+}-1.4\text{V}$ to $V_{S+}-1.2\text{V}$ on the low end, up to $V_{S+}-1\text{V}$ to $V_{S+}-0.8\text{V}$ on the high end. Within this transition region, PSRR, CMRR, offset voltage, offset drift, and THD can be degraded compared to device operation outside this region.

The typical input bias current of the GD30AP72x during normal operation is approximately 1pA. In overdriven conditions, the bias current can increase significantly. The most common cause of an overdriven condition occurs when the operational amplifier is outside of the linear range of operation. When the output of the operational amplifier is driven to one of the supply rails, the feedback loop requirements cannot be satisfied and a differential input voltage develops across the input pins. This differential input voltage results in activation of parasitic diodes inside the front-end input chopping switches that combine with electromagnetic interference (EMI) filter resistors to create the equivalent circuit. Notice that the input bias current remains within specification in the linear region.

6.3 Input EMI Filter and Clamp Circuit

[Figure 15](#) shows the input EMI filter and clamp circuit. The GD30AP72x op-amps have internal ESD protection diodes (D1, D2, D3, and D4) that are connected between the inputs and each supply rail. These diodes protect

the input transistors in the event of electrostatic discharge and are reverse biased during normal operation. This protection scheme allows voltages as high as approximately 500mV beyond the rails to be applied at the input of either terminal without causing permanent damage. These ESD protection current-steering diodes also provide in-circuit, input overdrive protection, as long as the current is limited to 20mA as stated in the [Absolute Maximum Ratings](#).

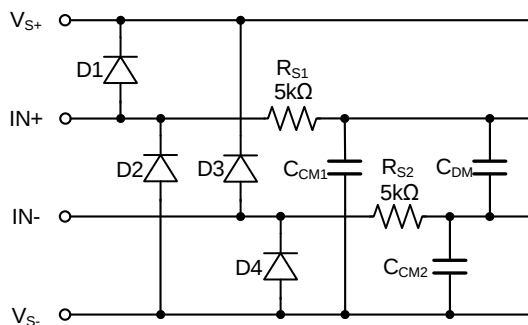


Figure 15. Input EMI Filter and Clamp Circuit

Operational amplifiers vary in susceptibility to EMI. If conducted EMI enters the operational amplifier, the dc offset at the amplifier output can shift from its nominal value when EMI is present. This shift is a result of signal rectification associated with the internal semiconductor junctions. Although all operational amplifier pin functions can be affected by EMI, the input pins are likely to be the most susceptible. The EMI filter of the GD30AP72x family is composed of two 5kΩ input series resistors (R_{S1} and R_{S2}), two common-mode capacitors (C_{CM1} and C_{CM2}), and a differential capacitor (C_{DM}). These RC networks set the -3dB low-pass cutoff frequencies at 35MHz for common-mode signals, and at 22MHz for differential signals. Package Information

6.4 Rail-to-Rail Output

Designed as a micro-power, low-noise operational amplifier, the GD30AP72x delivers a robust output drive capability. A class AB output stage with common-source transistors is used to achieve full rail-to-rail output swing capability. For resistive loads up to 100kΩ, the output swings typically to within 5mV of either supply rail regardless of the power-supply voltage applied. Different load conditions change the ability of the amplifier to swing close to the rails. For resistive loads up to 600Ω, the output swings typically to within 125mV of the positive supply rail and within 88mV of the negative supply rail.

6.5 Capacitive Load and Stability

The GD30AP72x family can safely drive capacitive loads of up to 500pF in any configuration. As with most amplifiers, driving larger capacitive loads than specified may cause excessive overshoot and ringing, or even oscillation. A heavy capacitive load reduces the phase margin and causes the amplifier frequency response to peak. Peaking corresponds to over-shooting or ringing in the time domain. Therefore, it is recommended that external compensation be used if the GD30AP72x op-amps must drive a load exceeding 500pF. This compensation is particularly important in the unity-gain configuration, which is the worst case for stability.

A quick and easy way to stabilize the op-amp for capacitive load drive is by adding a series resistor, R_{ISO} , between the amplifier output terminal and the load capacitance, as shown in Figure 16. R_{ISO} isolates the amplifier output and feedback network from the capacitive load. The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. Note that this method results in a loss of gain accuracy because R_{ISO} forms a voltage divider with the R_L .

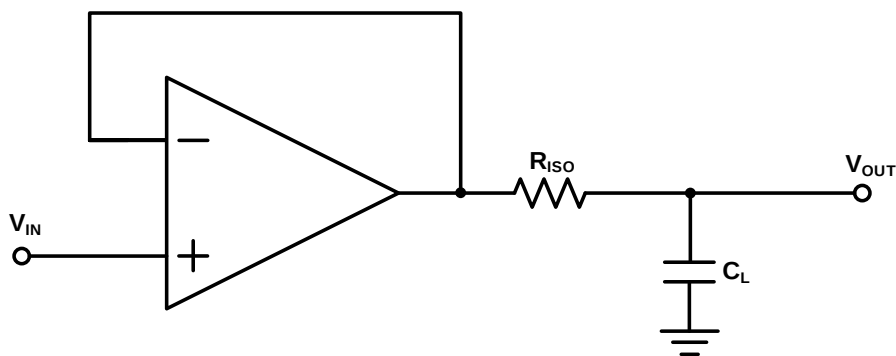


Figure 16. Indirectly Driving Heavy Capacitive Load

An improvement circuit is shown in [Figure 17](#). It provides DC accuracy as well as AC stability. The R_F provides the DC accuracy by connecting the inverting signal with the output.

The C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving phase margin in the overall feedback loop.

For no-buffer configuration, there are two others ways to increase the phase margin: (a) by increasing the amplifier's gain, or (b) by placing a capacitor in parallel with the feedback resistor to counteract the parasitic capacitance associated with inverting node.

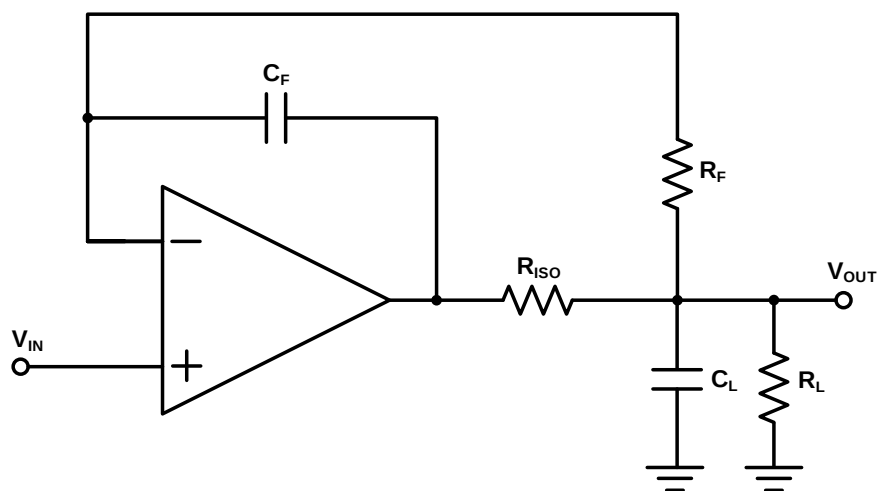


Figure 17. Indirectly Driving Heavy Capacitive Load with DC Accuracy

6.6 Overload Recovery

Overload recovery is defined as the time required for the operational amplifier output to recover from a saturated state to a linear state. The output devices of the operational amplifier enter a saturation region when the output voltage exceeds the rated operating voltage, either because of the high input voltage or the high gain. After the device enters the saturation region, the charge carriers in the output devices require time to return back to the linear state. After the charge carriers return back to the linear state, the device begins to slew at the specified slew rate. Thus, the propagation delay in case of an overload condition is the sum of the overload recovery time and the slew time. The overload recovery time for the GD30AP72x family is approximately 0.3 μ s.

6.7 EMI Rejection Ratio

Circuit performance is often adversely affected by high frequency EMI. When the signal strength is low and

transmission lines are long, an op-amp must accurately amplify the input signals. However, all op-amp pins — the non-inverting input, inverting input, positive supply, negative supply, and output pins — are susceptible to EMI signals. These high frequency signals are coupled into an op-amp by various means, such as conduction, near field radiation, or far field radiation. For example, wires and printed circuit board (PCB) traces can act as antennas and pick up high frequency EMI signals.

Amplifiers do not amplify EMI or RF signals due to their relatively low bandwidth. However, due to the nonlinearities of the input devices, op-amps can rectify these out of band signals. When these high frequency signals are rectified, they appear as a dc offset at the output.

The GD30AP72x op-amps have integrated EMI filters at their input stage. A mathematical method of measuring EMIRR is defined as follows:

$$\text{EMIRR} = 20 \times \log \left(\frac{V_{\text{IN_PEAK}}}{\Delta V_{\text{OS}}} \right) \quad (1)$$

6.8 Input-to-Output Coupling

To minimize capacitive coupling, the input and output signal traces should not be parallel. This helps reduce unwanted positive feedback.

6.9 Maximizing Performance Through Proper Layout

To achieve the maximum performance of the extremely high input impedance and low offset voltage of the GD30AP72x op-amps, care is needed in laying out the circuit board. The PCB surface must remain clean and free of moisture to avoid leakage currents between adjacent traces. Surface coating of the circuit board reduces surface moisture and provides a humidity barrier, reducing parasitic resistance on the board. The use of guard rings around the amplifier inputs further reduces leakage currents. Figure 18 shows proper guard ring configuration and the top view of a surface-mount layout. The guard ring does not need to be a specific width, but it should form a continuous loop around both inputs. By setting the guard ring voltage equal to the voltage at the non-inverting input, parasitic capacitance is minimized as well. For further reduction of leakage currents, components can be mounted to the PCB using Teflon standoff insulators.

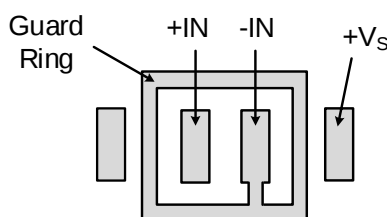


Figure 18. Use a Guard Ring around Sensitive Pins

Other potential sources of offset error are thermoelectric voltages on the circuit board. This voltage, also called Seebeck voltage, occurs at the junction of two dissimilar metals and is proportional to the temperature of the junction. The most common metallic junctions on a circuit board are solder-to-board trace and solder-to-component lead. If the temperature of the PCB at one end of the component is different from the temperature at the other end, the resulting Seebeck voltages are not equal, resulting in a thermal voltage error.

This thermocouple error can be reduced by using dummy components to match the thermoelectric error source. Placing the dummy component as close as possible to its partner ensures both Seebeck voltages are equal, thus

canceling the thermocouple error. Maintaining a constant ambient temperature on the circuit board further reduces this error. The use of a ground plane helps distribute heat throughout the board and reduces EMI noise pickup.

7 Application Information

7.1 Typical Application Circuit

7.1.1 Active Filter

The GD30AP72x family is well-suited for active filter applications that require a wide bandwidth, fast slew rate, low-noise, single-supply operational amplifier. Figure 19 shows a 500kHz, second-order, low-pass filter using the multiple-feedback (MFB) topology. The components have been selected to provide a maximally-flat Butterworth response. Beyond the cut-off frequency, roll-off is -40dB/dec . The Butterworth response is ideal for applications that require predictable gain characteristics, such as the anti-aliasing filter used in front of an ADC.

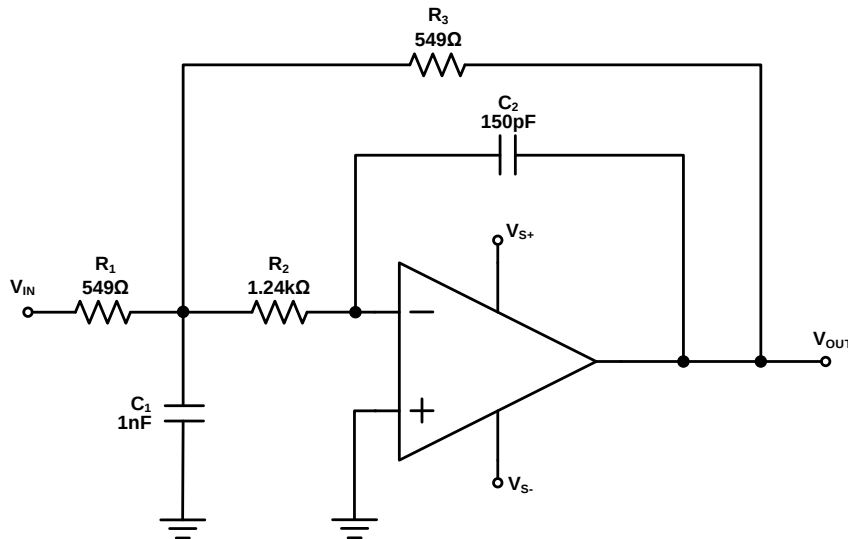


Figure 19. Second-Order, Butterworth, 500 KHz Low-Pass Filter

One point to observe when considering the MFB filter is that the output is inverted, relative to the input. If this inversion is not required, or not desired, a non-inverting output can be achieved through one of these options:

1. adding an inverting amplifier;
2. adding an additional second-order MFB stage;
3. using a non-inverting filter topology, such as the Sallen-Key (shown in Figure 20).

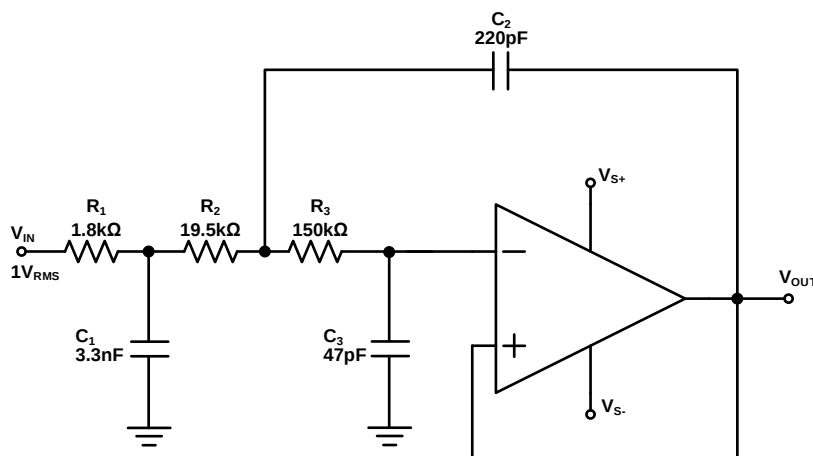


Figure 20. Configured as a Three-Pole, 20KHz, Sallen-Key Filter

7.1.2 Motor Phase Current Sensing

The current sensing amplification shown in Figure 21 has a slew rate of $2\pi fV_{PP}$ for the output of sine wave signal, and has a slew rate of $2fV_{PP}$ for the output of triangular wave signal. In most of motor control systems, the PWM frequency is at 10KHz to 20KHz, and one cycle time is $100\mu s$ for a 10KHz of PWM frequency. In current shunt monitoring for a motor phase, the phase current is converted to a phase voltage signal for ADC sampling. This sampling voltage signal must be settled before entering the ADC. As the Figure 21 shown, the total settling time of a current shunt monitor circuit includes: the rising edge delay time (t_{SR}) due to the op-amp's slew rate, and the measurement settling time (t_{SET}). For a 2-shunt solution of motor phase current sensing, if the minimum duty cycle of the PWM is defined at 5%, and the t_{SR} is required at 20% of a total time window for a phase current monitoring, in case of a 3.3V motor control system (3.3V MCU with 12-bit ADC), the op-amp's slew rate should be more than:

$$\frac{3.3V}{100\mu s \times 5\% \times 20\%} = 3.3V / \mu s \quad (2)$$

At the same time, the op-amp's bandwidth should be much greater than the PWM frequency, like 10 time at least.

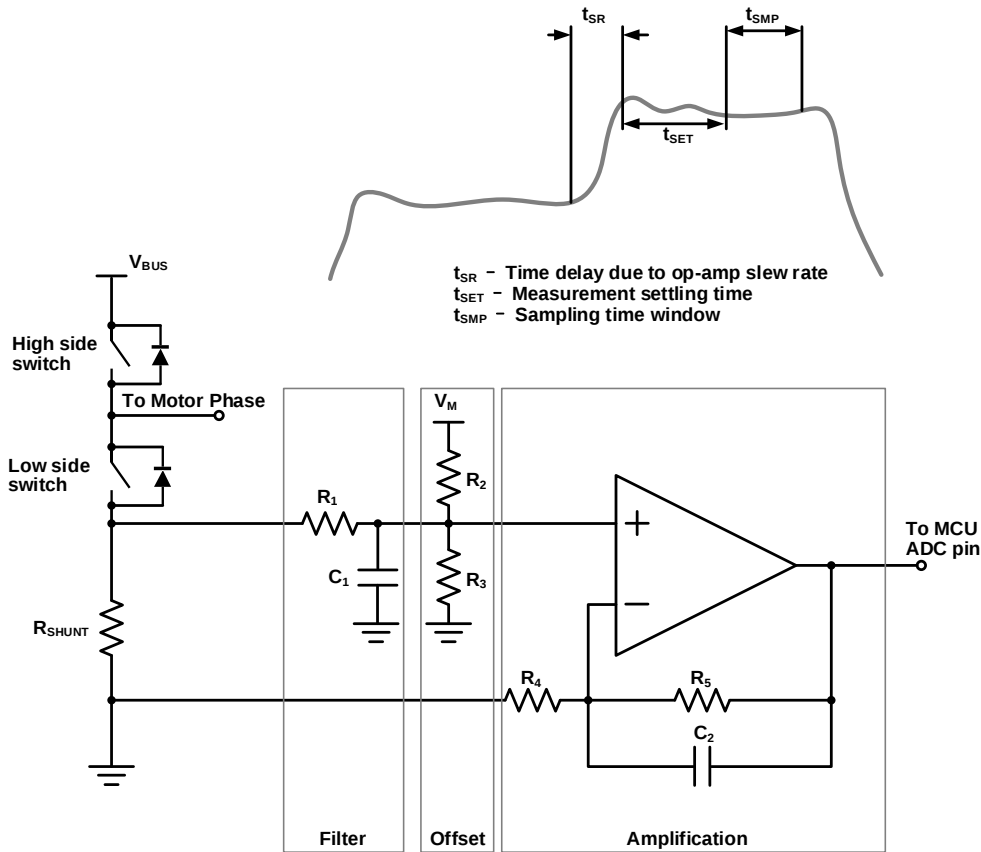


Figure 21. Current Shunt Monitor Circuit

7.1.3 Differential Amplifier

The circuit shown in Figure 22 performs the difference function. If the resistors ratios are equal $R_4/R_3 = R_2/R_1$, then:

$$V_{OUT} = (V_P - V_N) \times \frac{R_2}{R_1} + V_{REF} \quad (3)$$

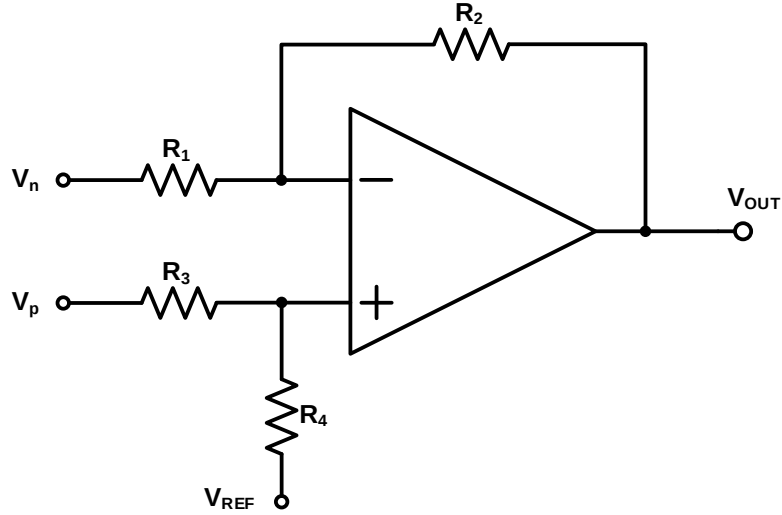


Figure 22. Differential Amplifier

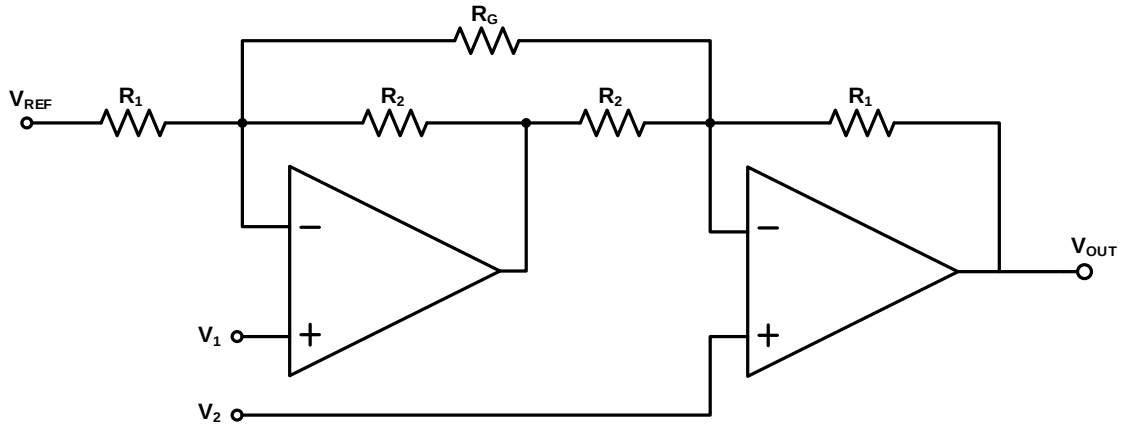


Figure 23. Instrumentation Amplifier

The GD30AP72x family is well suited for conditioning sensor signals in battery-powered applications. Figure 23 shows a two op-amp instrumentation amplifier, using the GD30AP72x op-amps. The circuit works well for applications requiring rejection of common-mode noise at higher gains. The reference voltage (V_{REF}) is supplied by a low-impedance source. In single voltage supply applications, the V_{REF} is typically $V_S/2$.

$$V_{OUT} = (V_2 - V_1) \times \left(1 + \frac{R_1}{R_2} + \frac{2R_1}{R_G} \right) + V_{REF} \quad (4)$$

7.1.4 Buffered Chemical Sensors

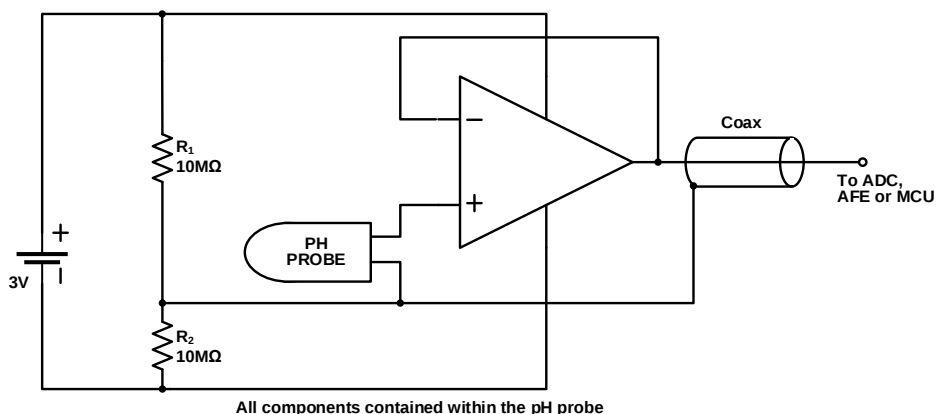



Figure 24. Buffered pH Probe

The GD30AP72x family has input bias current in the pA range. This is ideal in buffering high impedance chemical sensors, such as pH probes. As an example, the circuit in [Figure 24](#) eliminates expansive low-leakage cables that is required to connect a pH probe (general purpose combination pH probes, e.g Corning 476540) to metering ICs such as ADC, AFE and/or MCU. A GD30AP72x op-amp and a lithium battery are housed in the probe assembly. A conventional low-cost coaxial cable can be used to carry the op-amp's output signal to subsequent ICs for pH reading.

8 Package Information

8.1 Outline Dimensions

SOT23-5L Package Outline

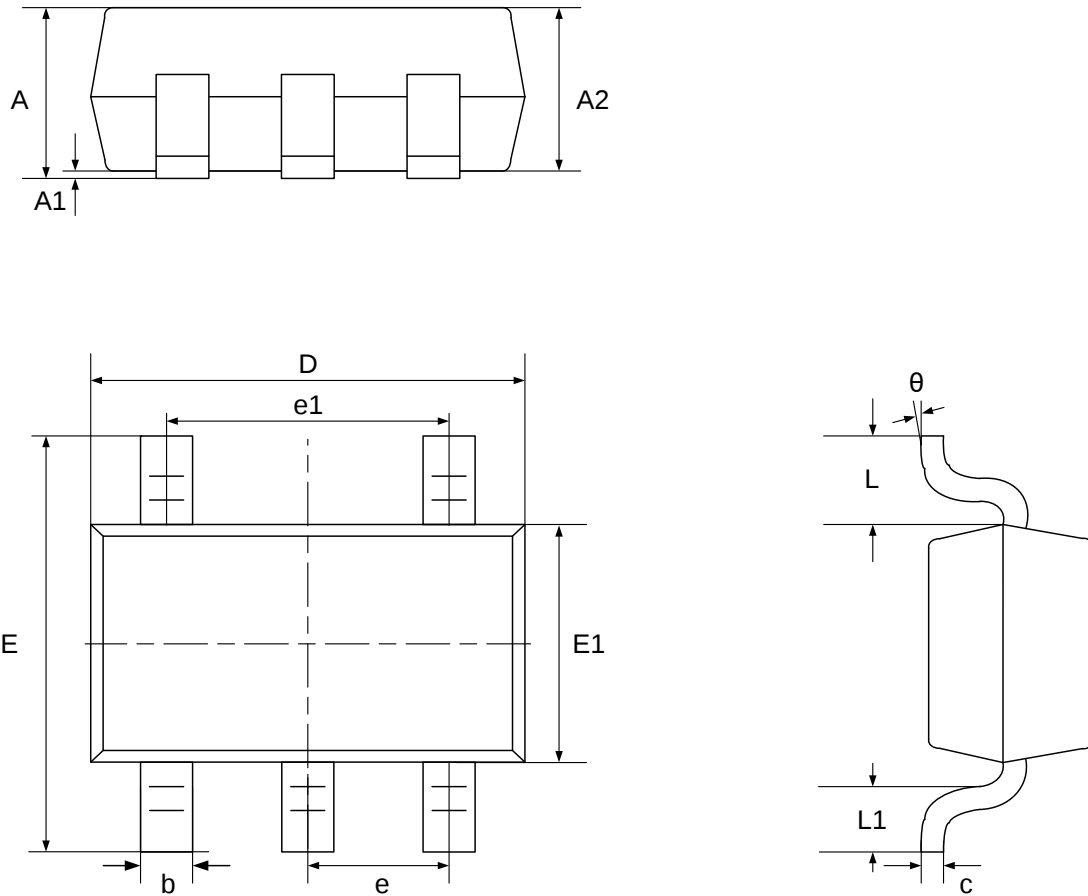


NOTES:

1. All dimensions are in millimeters.
2. Package dimensions does not include mold flash, protrusions, or gate burrs.
3. Refer to the [Table 1 SOT23-5L dimensions\(mm\)](#).

Table 1. SOT23-5L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A			1.35
A1	0.00		0.15
A2	1.00		1.20
b	0.35		0.45
c	0.14		0.20
D	2.82		3.02
E	2.60		3.00
E1	1.526		1.726
e	0.95 BSC		
e1	1.90 BSC		
L	0.60 REF		
L1	0.30		0.60
θ	0°		8°

DFN2x2-8L Package Outline

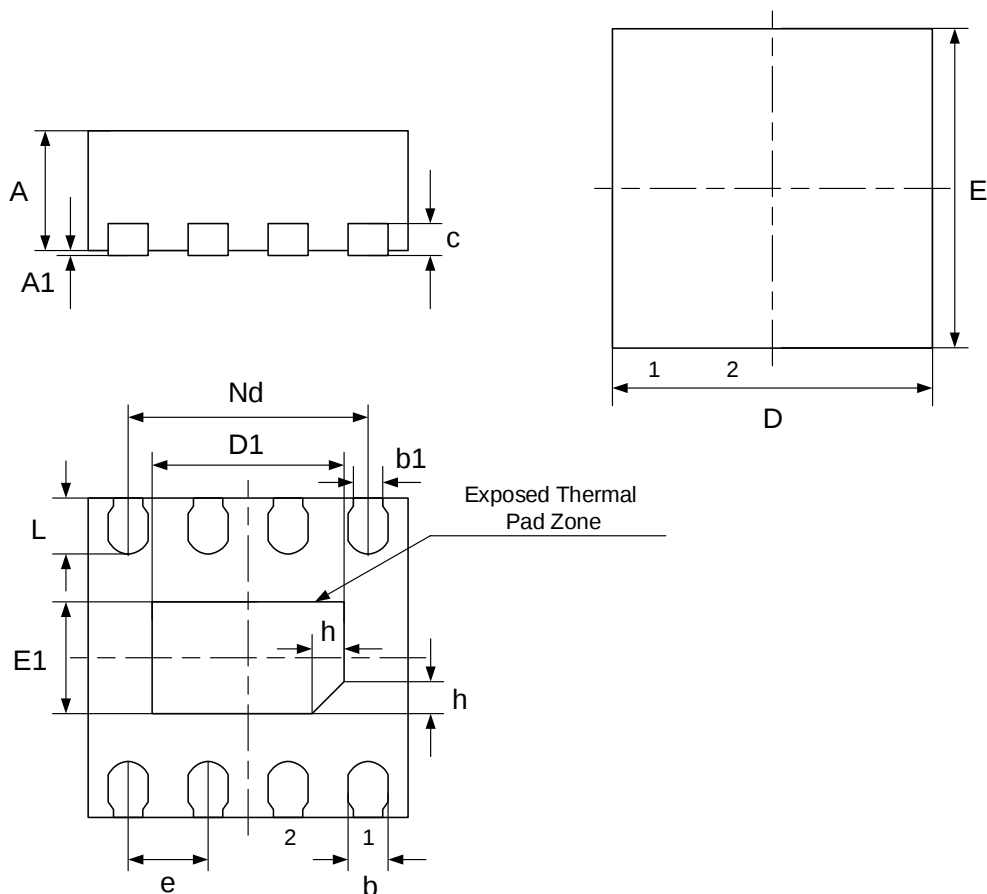


NOTES: (continued)

1. Refer to the [Table 2 DFN2x2-8L dimensions\(mm\)](#).

Table 2. DFN2x2-8L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A	0.70	0.75	0.80
A1		0.02	0.05
b	0.20	0.25	0.30
b1	0.18 REF		
c	0.18	0.20	0.25
D	1.90	2.00	1.30
D1	1.10	1.20	1.30
Nd	1.50 BSC		
E	1.90	2.00	2.10
E1	0.60	0.70	0.80
e	0.50 BSC		
L	0.30	0.35	0.40
h	0.15	0.20	0.25

SOIC-8L Package Outline

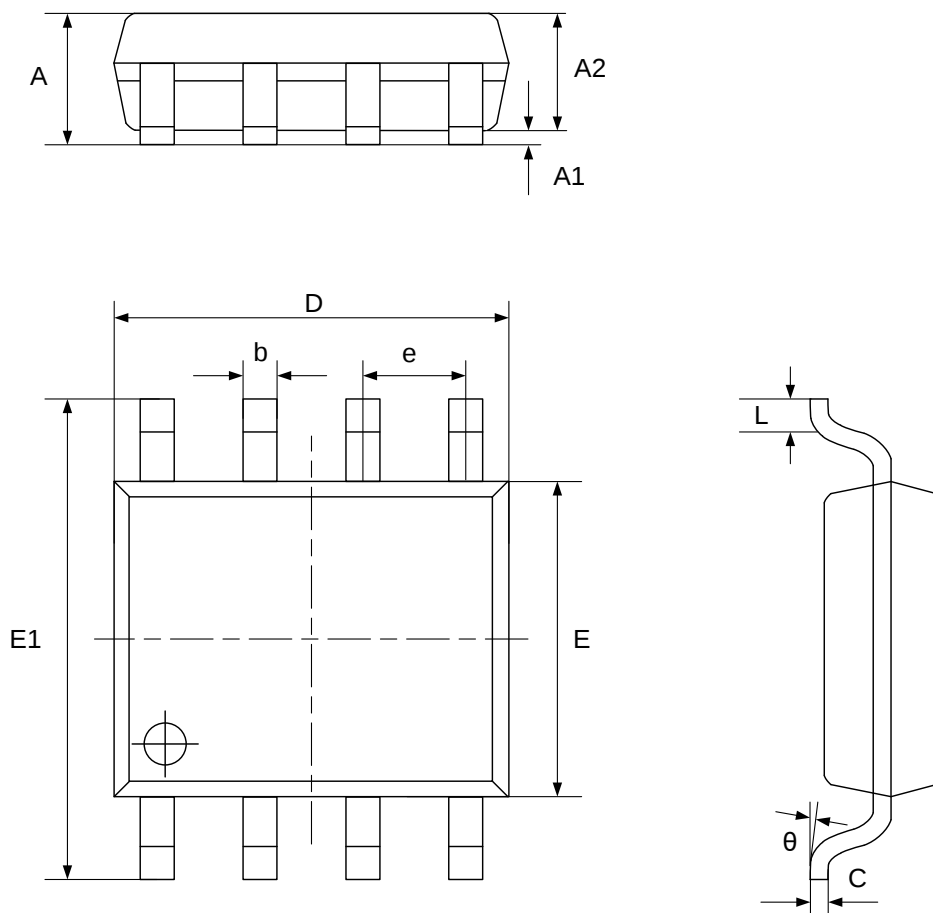


NOTES: (continued)

1. Refer to the [Table 3 SOIC-8L dimensions\(mm\)](#).

Table 3. SOIC-8L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A	1.370		1.670
A1	0.070		0.170
A2	1.300		1.500
b	0.306		0.506
C		0.203	
D	4.700		5.100
E	3.820		4.020
E1	5.800		6.200
e		1.270	
L	0.450		0.750
θ	0°		8°

MSOP-8L Package Outline

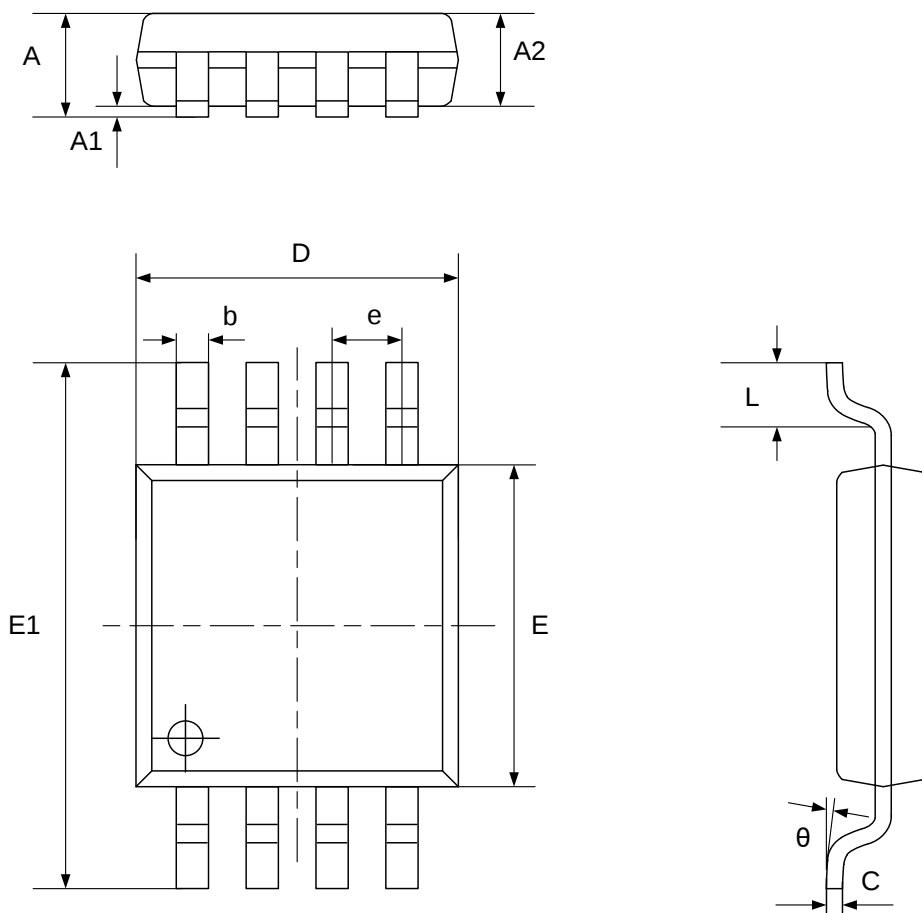


NOTES: (continued)

1. Refer to the [Table 4 MSOP-8L dimensions\(mm\)](#).

Table 4. MSOP-8L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A	0.800		1.100
A1	0.050		0.150
A2	0.750		0.950
b	0.290		0.380
C	0.150		0.200
D	2.900		3.100
E	2.900		3.100
E1	4.700		5.100
e		0.650	
L	0.400		0.700
θ	0°		8°

SOT23-8L Package Outline

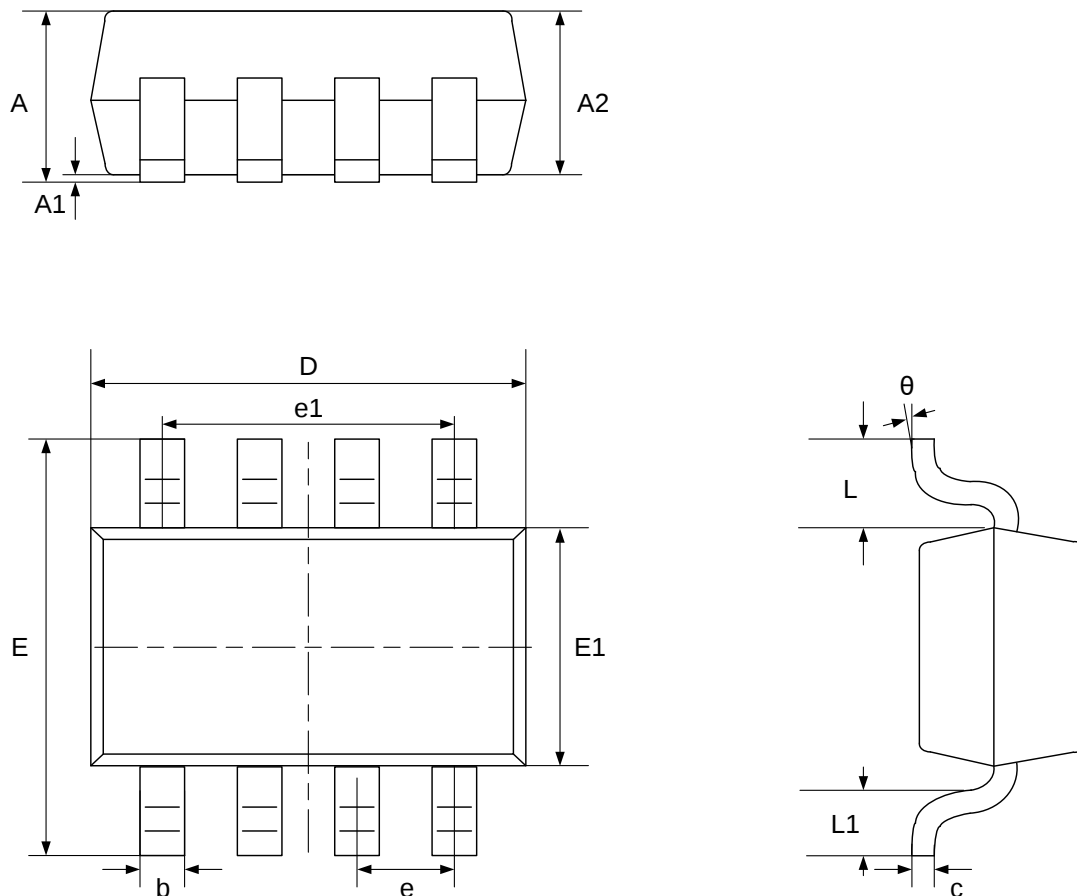


NOTES: (continued)

1. Refer to the [Table 5 SOT23-8L dimensions\(mm\)](#).

Table 5. SOT23-8L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A			1.40
A1	0		0.15
A2	0.90	1.20	1.25
b	0.22		0.38
c	0.08		0.22
D	2.90 BSC		
E	2.80 BSC		
E1	1.60 BSC		
e	0.65 BSC		
e1	1.95 BSC		
L	0.60 BSC		
L1	0.30	0.45	0.60
θ	0°	4°	8°

SOIC-14L Package Outline

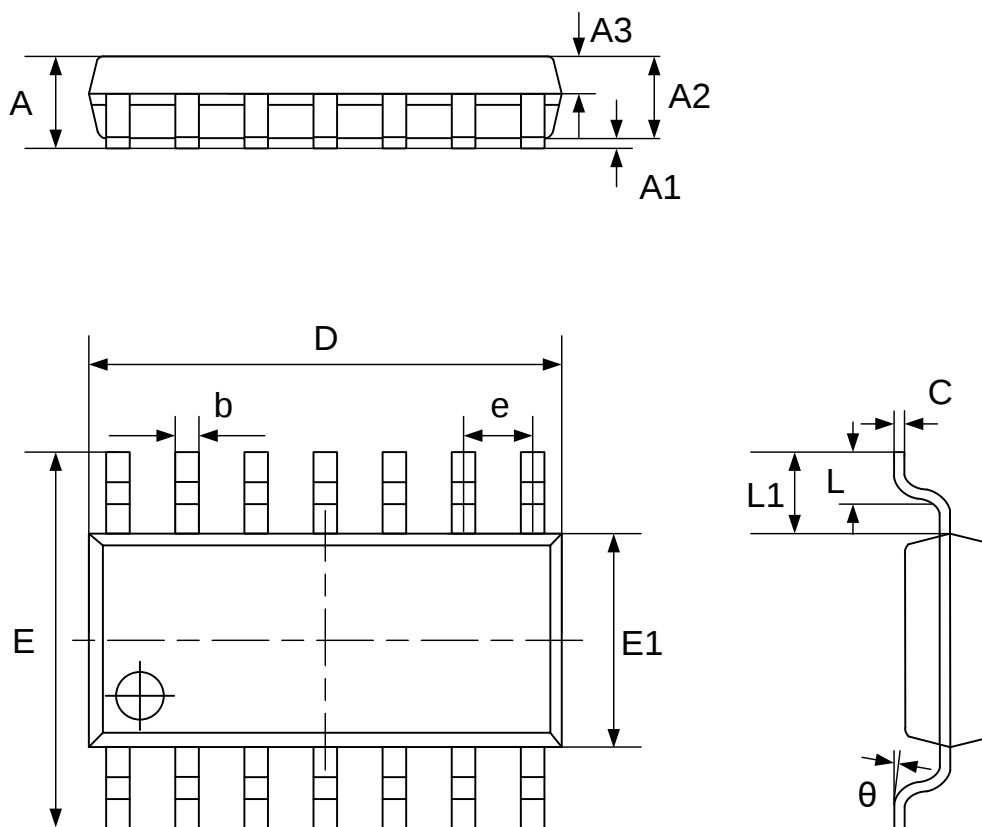


NOTES: (continued)

1. Refer to the [Table 6 SOIC-14L dimensions\(mm\)](#).

Table 6. SOIC-14L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A	1.450		1.850
A1	0.100		0.300
A2	1.350		1.550
A3	0.550		0.750
b		0.406	
C		0.203	
D	8.630		8.830
E	5.840		6.240
E1	3.850		4.050
e		1.270	
L1	1.040 REF		
L	0.350		0.750
θ	2°		8°

TSSOP-14L Package Outline

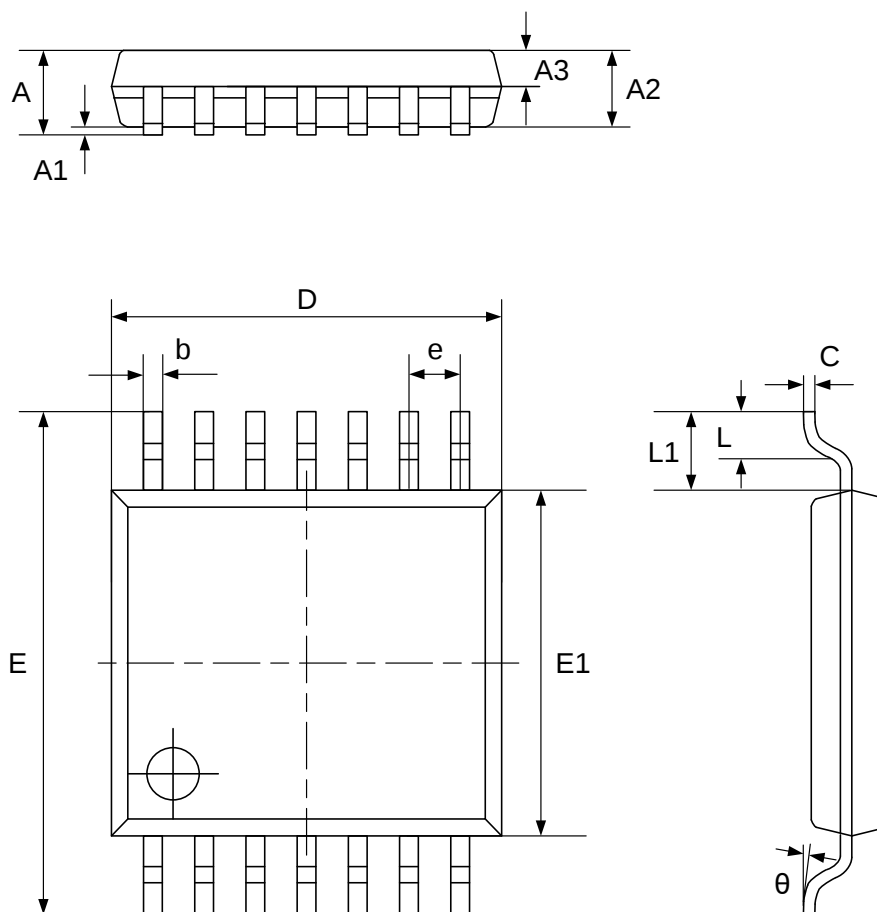

NOTES: (continued)


1. Refer to the [Table 7 TSSOP-14L dimensions\(mm\)](#).

Table 7. TSSOP-14L dimensions(mm)

SYMBOL	MIN	TYP	MAX
A			1.200
A1	0.050		0.150
A2	0.900		1.050
A3	0.390		0.490
b	0.200		0.290
C	0.130		0.180
D	4.860		5.060
E	6.200		6.600
E1	4.300		4.500
e		0.650	
L1	1.000 REF		
L	0.450		0.750
θ	0°		8°

8.2 Recommended Land Pattern


SOT23-5L Land Pattern Example

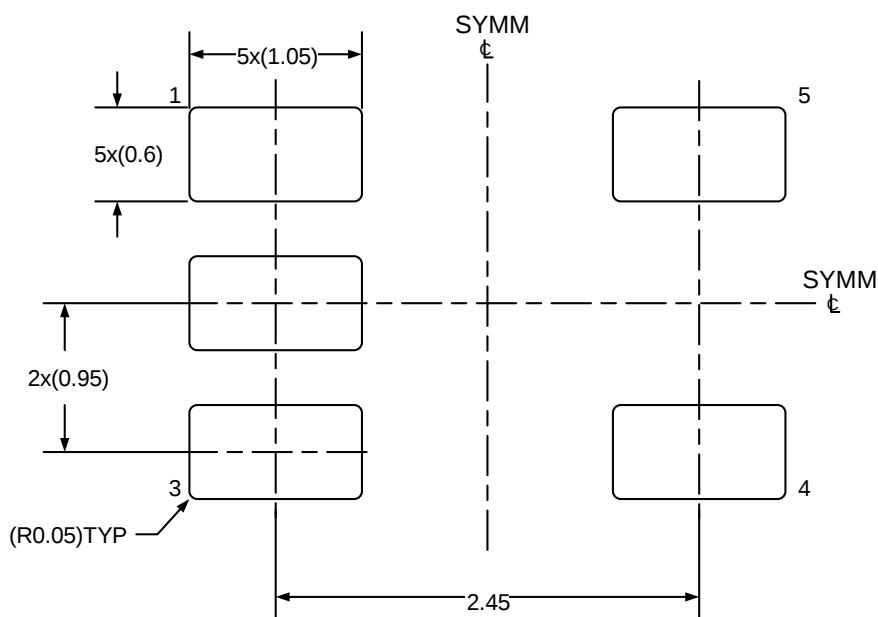

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 20X scale.


DFN2x2-8L Land Pattern Example

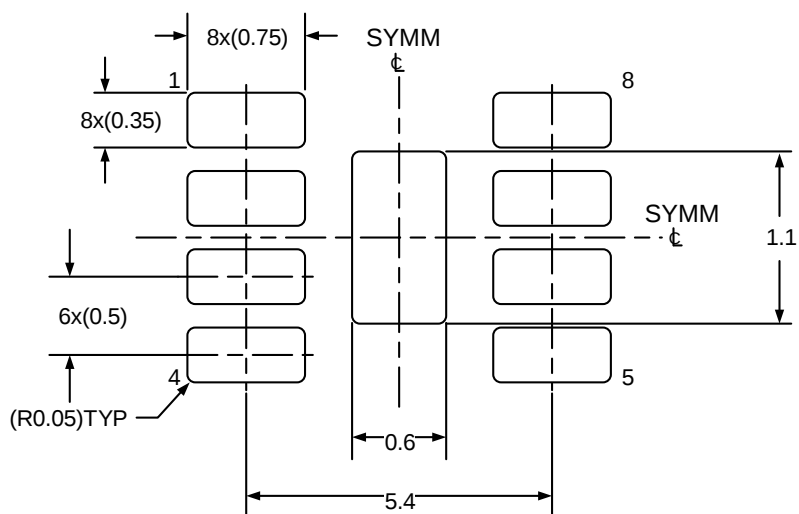

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 20X scale.


SOIC-8L Land Pattern Example

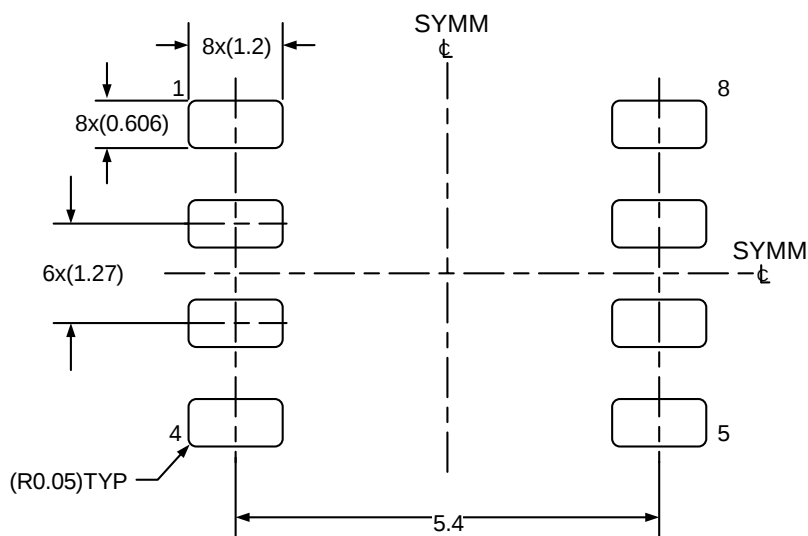

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 10X scale.


MSOP-8L Land Pattern Example

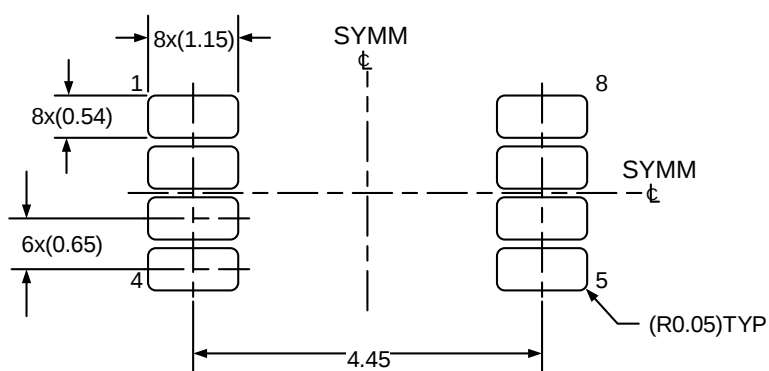

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 10X scale.


SOT23-8L Land Pattern Example

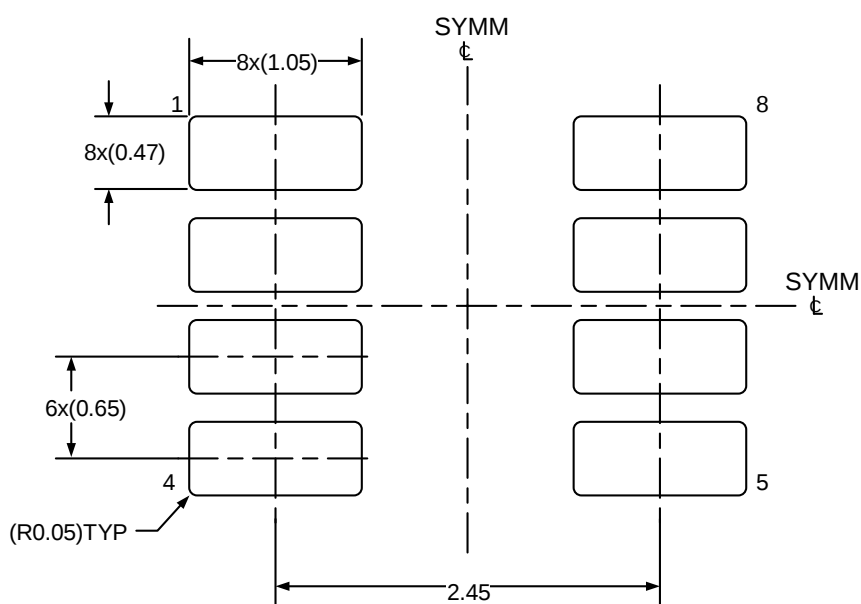

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 20X scale.


SOIC-14L Land Pattern Example

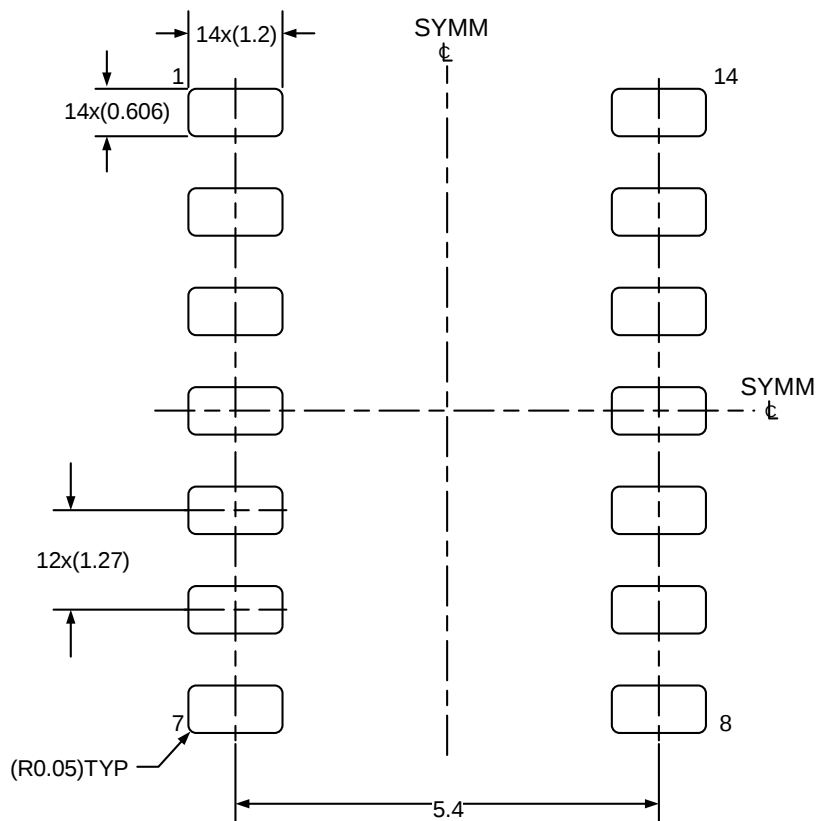

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 10X scale.

TSSOP-14L Land Pattern Example

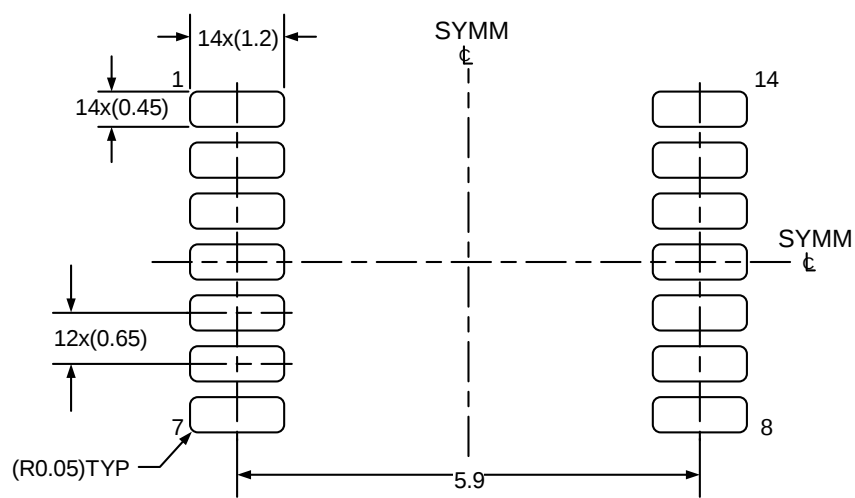

NOTES: (continued)

1. Refer to the IPC-7351 can also help you complete the designs.
2. Exposed metal shown.
3. Drawing is 10X scale.

9 Ordering Information

Ordering Code	Package Type	ECO Plan	Packing Type	MOQ	OP Temp(°C)
GD30AP721ANSTR-I01	SOT23-5L	Green	Tape & Reel	3000	-40°C to +125°C
GD30AP722AWETR-I02	DFN2x2-8L	Green	Tape & Reel	3000	-40°C to +125°C
GD30AP722AWLTR-I02	SOIC-8L	Green	Tape & Reel	4000	-40°C to +125°C
GD30AP722AWMTR-I02	MSOP-8L	Green	Tape & Reel	3000	-40°C to +125°C
GD30AP722AWSTR-I02	SOT23-8L	Green	Tape & Reel	3000	-40°C to +125°C
GD30AP724AZLTR-I04	SOIC-14L	Green	Tape & Reel	2500	-40°C to +125°C
GD30AP724AZPTR-I04	TSSOP-14L	Green	Tape & Reel	3000	-40°C to +125°C

10 Revision History

REVISION NUMBER	DESCRIPTION	DATE
1.0	Initial release and device details	2024
1.1	1. Delete GD30AP721AWLTR-I01, SOIC-8L package; 2. Delete GD30AP722AWPTR-I02, TSSOP-8L package; 3. Delete GD30AP723 series.	2025
1.2	Revise the temperature range in the Ordering Information section.	2025

Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the "Product"), is owned by the Company according to the laws of the People's Republic of China and other applicable laws. The Company reserves all rights under such laws and no Intellectual Property Rights are transferred (either wholly or partially) or licensed by the Company (either expressly or impliedly) herein. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

The Company makes no representations or warranties of any kind, express or implied, with regard to the merchantability and the fitness for a particular purpose of the Product, nor does the Company assume any liability arising out of the application or use of any Product described in this document. Any information provided in this document is provided only for reference purposes. It is the sole responsibility of the user of this document to determine whether the Product is suitable and fit for its applications and products planned, and properly design, program, and test the functionality and safety of its applications and products planned using the Product. Unless otherwise expressly specified in the datasheet of the Product, the Product is designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and the Product is not designed or intended for use in (i) safety critical applications such as weapons systems, nuclear facilities, atomic energy controller, combustion controller, aeronautic or aerospace applications, traffic signal instruments, pollution control or hazardous substance management; (ii) life-support systems, other medical equipment or systems (including life support equipment and surgical implants); (iii) automotive applications or environments, including but not limited to applications for active and passive safety of automobiles (regardless of front market or aftermarket), for example, EPS, braking, ADAS (camera/fusion), EMS, TCU, BMS, BSG, TPMS, Airbag, Suspension, DMS, ICMS, Domain, ESC, DCDC, e-clutch, advanced-lighting, etc.. Automobile herein means a vehicle propelled by a self-contained motor, engine or the like, such as, without limitation, cars, trucks, motorcycles, electric cars, and other transportation devices; and/or (iv) other uses where the failure of the device or the Product can reasonably be expected to result in personal injury, death, or severe property or environmental damage (collectively "Unintended Uses"). Customers shall take any and all actions to ensure the Product meets the applicable laws and regulations. The Company is not liable for, in whole or in part, and customers shall hereby release the Company as well as its suppliers and/or distributors from, any claim, damage, or other liability arising from or related to all Unintended Uses of the Product. Customers shall indemnify and hold the Company, and its officers, employees, subsidiaries, affiliates as well as its suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Product.

Information in this document is provided solely in connection with the Product. The Company reserves the right to make changes, corrections, modifications or improvements to this document and the Product described herein at any time without notice. The Company shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024-2025 GigaDevice – All rights reserved